

# BIOHIT Picus Electronic Pipette





## Picus. Revolutionize your Pipetting!

Meet Picus - the Red Dot awarded electronic pipette that eases your work load, protects you from injuries by ensuring optimal working posture and allows accurate and precise pipetting results!

Laboratory professionals need instruments that are ergonomic, easy to use and reliable. To meet those needs, Biohit, known as forerunner in liquid handling products with a long history in developing high quality pipettes, has now set a completely new standard for electronic pipettes. A dedicated team of R&D and ergonomics professionals, together with laboratory personnel, has developed a new technology with your needs and well being in mind. The result is the most ergonomic and sophisticated pipette in the market for laboratory professionals who demand the highest quality, safety and reliability in their work. The outstanding design of Picus was awarded with the Red dot design award in 2012.









Intuitive user-interface

### Technical features

- Calibration adjustment in 1-, 2- or 3-points
- Information for the service and calibration intervals
- Autoclavable lower parts (excl. 1200 μl models)
- Charging in charging stand or with micro USB cable
- Possible to continue working with USB charging connected
- Li-Polymer battery enables charging time in approx. 1 hour



#### **Ergonomics**

- Lightest and smallest electronic pipette (only 100 g)
- Comfortable handle design and finger hook
- Unique electronic tip ejection
- Together with our distinquished Pipetting Academy training program, Picus will help you improve your health and safety in the lab



#### Optiload for perfect tip sealing

- Allows tip loading with an equal constant force to every channel
- Enables perfect tip sealing to every individual tip cone












in all models  $> 10 \mu l$  to prevent contamination

### Highlights

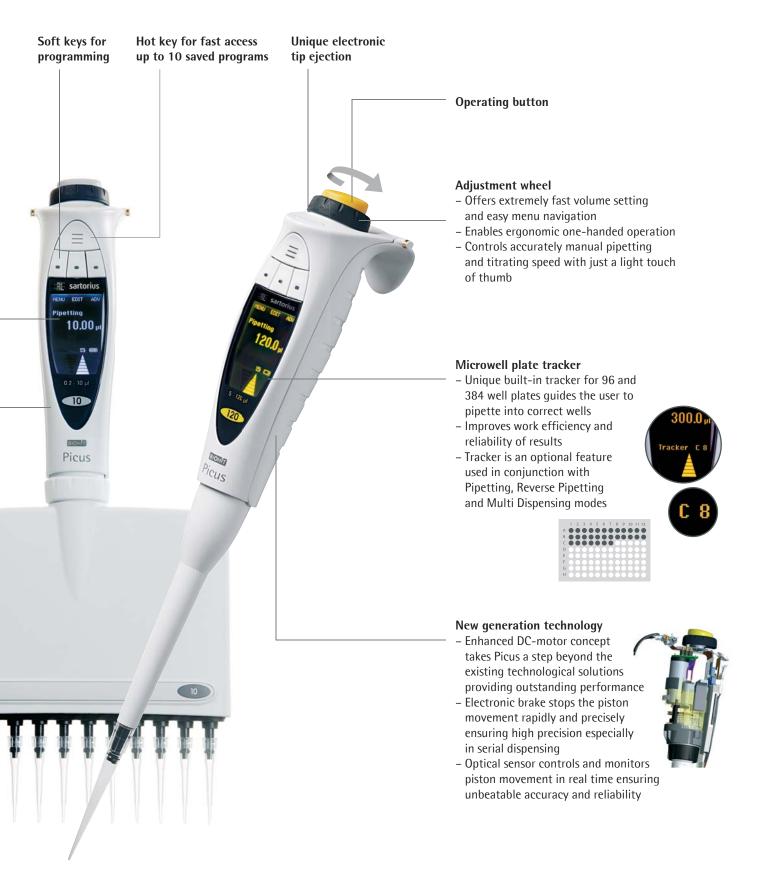

### Pipetting modes

| Main mode -                      |           | Additional functions - to be used in conjunction with the main mode |        |         |                             |                         |  |  |  |
|----------------------------------|-----------|---|--------|---------|-----------------------------|-------------------------|--|--|--|
| available in all Picus<br>models |           | Tracker   | Mixing | Counter | Excess Volume<br>Adjustment | Auto Dispensing (Timed) |  |  |  |
| Pipetting                        | $\sqrt{}$ | •   | •      | •       |                             |                         |  |  |  |
| Reverse Pipetting                | $\sqrt{}$ | •   |        | •       | •                           |                         |  |  |  |
| Manual Pipetting                 | $\sqrt{}$ |   |        |         |                             |                         |  |  |  |
| Multi Dispensing                 | $\sqrt{}$ | •   |        |         | •                           | •                       |  |  |  |
| Diluting                         |           |   | •      |         |                             |                         |  |  |  |
| Sequential Dispensing            | $\sqrt{}$ |   |        |         | •                           |                         |  |  |  |
| Multi Aspiration                 |           |   |        |         |                             |                         |  |  |  |
| Titrate                          | $\sqrt{}$ |   |        |         |                             |                         |  |  |  |

### Pipette stands ordering details

| Model No. | FS Cat. No. | Channels                         |
|-----------|-------------|----------------------------------|
| 730981    | 14-559-392  | Charging Stand for one pipette   |
| 730991    | 14-559-393  | Charging Carousel for 4 pipettes |
| 725620    | 14-559-420  | Linear Stand                     |

Charging stands include universal AC-adaptor (EU, UK, US  $\mid$  JPN and CHN plugs)





### Ordering details

| Model<br>No. | FS Cat. No. | Channels | Volume<br>Range (μΙ) | Incre-<br>ment<br>(μΙ) | Test<br>Volume        | lnacc.<br>(%)              | lmpr.<br>(%)               | Safe-Cone Filters |        | Optifit<br>Standard | SafetySpace™<br>Filter Tips |
|--------------|-------------|----------|----------------------|------------------------|-----------------------|----------------------------|----------------------------|-------------------|--------|---------------------|-----------------------------|
|              |             |          |                      |                        | (μl)                  |                            |                            | Standard          | Plus   | Tips                | '                           |
| 735021       | 14-559-350  | 1        | 0.2 – 10             | 0.02                   | 10<br>5<br>1          | 0.90 %<br>1.00 %<br>2.50 % | 0.40 %<br>0.70 %<br>1.50 % | -                 | -      | 10                  | 10                          |
| 735041       | 14-559-351  | 1        | <b>5</b> – 120       | 0.10                   | 120<br>60<br>12       | 0.40 %<br>0.60 %<br>2.00 % | 0.15 %<br>0.20 %<br>1.00 % | 721008            | 721018 | 200, 350            | 120                         |
| 735061       | 14-559-352  | 1        | <b>1</b> 0 – 300     | 0.20                   | 300<br>150<br>30      | 0.40 %<br>0.60 %<br>1.50 % | 0.15 %<br>0.20 %<br>0.80 % | 721007            | 721017 | 350                 | 300                         |
| 735081       | 14-559-353  | 1        | • 50 – 1000          | 1.00                   | 1000<br>500<br>100    | 0.40 %<br>0.60 %<br>1.50 % | 0.15 %<br>0.20 %<br>0.50 % | 721006            | 721016 | 1000                | 1000                        |
| 735101       | 14-559-354  | 1        | • 100 – 5000         | 5.00                   | 5000<br>2500<br>500   | 0.50 %<br>0.80 %<br>1.00 % | 0.15 %<br>0.20 %<br>0.40 % | 721005            | 721015 | 5000                | -                           |
| 735111       | 14-559-355  | 1        | •<br>500 – 10000     | 10.00                  | 10000<br>5000<br>1000 | 0.60 %<br>1.20 %<br>3.00 % | 0.20 %<br>0.30 %<br>0.60 % | 721005            | 721015 | 10000               | -                           |
| 735321       | 14-559-356  | 8        | 0.2 - 10             | 0.02                   | 10<br>5<br>1          | 0.90 %<br>1.50 %<br>4.00 % | 0.50 %<br>0.80 %<br>3.00 % | -                 | -      | 10                  | 10                          |
| 735341       | 14-559-357  | 8        | • 5-120              | 0.10                   | 120<br>60<br>12       | 0.50 %<br>0.70 %<br>2.00 % | 0.20 %<br>0.30 %<br>1.50 % | 721008            | 721018 | 200, 350            | 120                         |
| 735361       | 14-559-358  | 8        | • 10-300             | 0.20                   | 300<br>150<br>30      | 0.50 %<br>0.70 %<br>2.00 % | 0.20 %<br>0.30 %<br>1.00 % | 721007            | 721017 | 350                 | 300                         |
| 735391       | 14-559-359  | 8        | • 50 – 1200          | 1.00                   | 1200<br>600<br>120    | 0.50 %<br>1.00 %<br>2.50 % | 0.20 %<br>0.30 %<br>1.00 % | 721006            | 721016 | 1200                | 1200                        |
| 735421       | 14-559-360  | 12       | 0.2 - 10             | 0.02                   | 10<br>5<br>1          | 0.90 %<br>1.50 %<br>4.00 % | 0.50 %<br>0.80 %<br>3.00 % | -                 | -      | 10                  | 10                          |
| 735441       | 14-559-361  | 12       | • 5-120              | 0.10                   | 120<br>60<br>12       | 0.50 %<br>0.70 %<br>2.00 % | 0.20 %<br>0.30 %<br>1.50 % | 721008            | 721018 | 200, 350            | 120                         |
| 735461       | 14-559-362  | 12       | • 10 – 300 μl        | 0.20                   | 300<br>150<br>30      | 0.50 %<br>0.70 %<br>2.00 % | 0.20 %<br>0.30 %<br>1.00 % | 721007            | 721017 | 350                 | 300                         |
| 735491       | 14-559-363  | 12       | • 50 – 1200<br>μl    | 1.00                   | 1200<br>600<br>120    | 0.50 %<br>1.00 %<br>2.50 % | 0.20 %<br>0.30 %<br>1.00 % | 721006            | 721016 | 1200                | 1200                        |

